

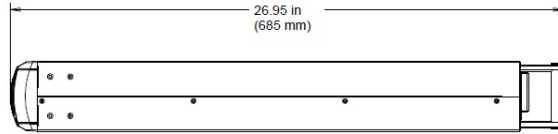



Sinergy III Series UPS 3000 VA High Voltage

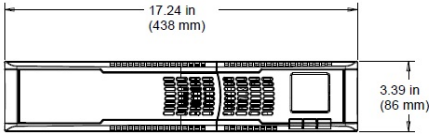

| | |
|-----------------------------------|--|
| Model | ACDEF3000-22 |
| Part Number | 17302-01R |
| Type | Sinergy III |
| Power Rating | 3000 VA / 2700 W |
| Topology | On-Line Double Conversion |
| Heat Dissipation (BTU/Hour) | 1500 at 100% Load |
| Input Voltage (Nominal) Range | 200-240 VAC 180-300 VAC |
| Input Frequency | 50/60 Hz \pm 4 (Auto Sense on Start-Up) |
| Input Power Factor | >0.95 |
| Input Current THD | <9.0% |
| Efficiency | >86.0% |
| Output Voltage | 208 VAC (Default) 200/220/230/240 VAC (Selectable) |
| Output Current | 14.4 A (Default) 15.0/13.6/13.0/12.5 A (Selectable) |
| Voltage Regulation | \pm 1.0% |
| Overload Online Mode | 100-105%: Continuous; Warning Only 105-130%: 2 Minutes 130-200%: 10 Seconds >200%: 250 Milliseconds |
| Overload Battery Mode | 100-105%: Continuous; Warning Only 105-130%: 10 Seconds >130%: 250 Milliseconds |
| Overload Bypass Mode | 100-110%: Continuous; Warning Only 110-120%: 30 Minutes 120-130%: 10 Minutes >130%: 1 Minute |
| Battery Voltage (Float / Nominal) | 82.1/72.0 VDC |
| Charger Current | 1.0 A |
| Backup Time (Full Load) | >3.6 Minutes |
| Communications Interface | USB / RS-232 |
| Shipping Weight | 83.0 lbs. / 37.7 kg. |


*

Front Panel Controls

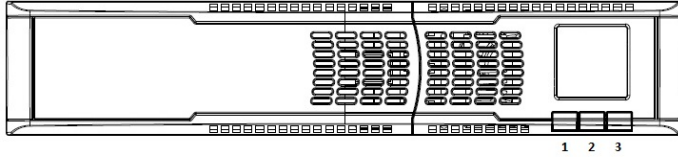

1. ON / MUTE - UP KEY (Previous Selection)
2. SELECT - DOWN KEY (Next Selection)
3. OFF / ENTER - CONFIRM KEY

Front Panel Display

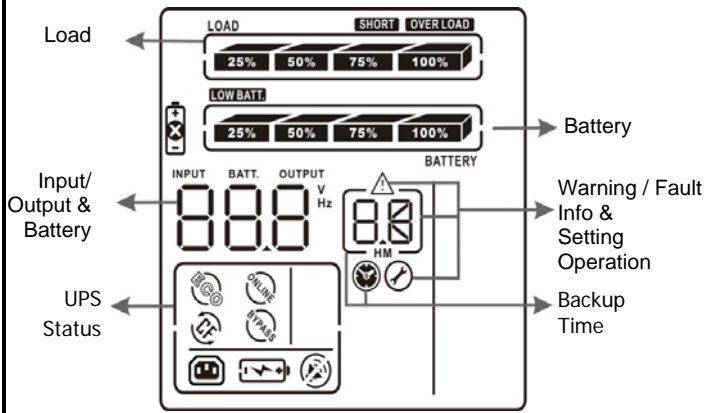

Rear Panel Information and Controls

- 6 Foot Detachable Line Cord with NEMA L6-20P
- (2) IEC320-C13
- (2) IEC320-C13 Programmable
- (1) IEC320-C19 Direct
- USB & RS-232 Communication
- SNMP Adapter (Optional)
- Internal Relay Contact Card (Optional)
- Circuit Breaker

Internal Batteries

- User Hot-Swappable (See Instruction Manual)
- Type - 12 V, 8.5 AH
- Quantity - 6 Batteries
- Recharge time - 12 Hours to 100%

Environmental

- Temperature: 0 to 40°C (32 to 104°F) Operating
-20 to 50°C (-40 to 122°F) Shipment, Storage
- Humidity: <90% Non-Condensing (Operating, Shipment, Storage)
- Altitude: <1000m Operating, No De-Rating
>1000m De-Rate Output 1% per 100m

Safety Agency and EMC Compliance

All units are listed by UL, and marked with the UL/cUL marking.

Product Listings

- UL1778
- cUL to CSA22.2 No.107.1

Product Compliances

- FCC Part 15J Class A
- IEC61000-4-2, Electrostatic Discharge
- IEC61000-4-3, Radiated Electromagnetic Field Immunity
- IEC61000-4-4, Electrical Fast Transient/Burst Immunity
- IEC61000-4-5, Surge Immunity
- IEC61000-4-6, CS
- IEC61000-4-8, Power Frequency Magnetic Field
- IEC61000-2-2, Low Frequency Signal
- RoHS

Warranty/Support: Sinergy III Series products (hereafter referred to as "Product") are warranted to be free from defects in material and workmanship for **two (2) years** from date of shipment from POWERVAR, on the chassis & electronic components and **two (2) years** from date of shipment from POWERVAR on the batteries. This warranty is limited to repairing, replacing, or refurbishing, at POWERVAR's option, any defective component, circuit board or module within the Product. This warranty will include, at POWERVAR's sole discretion, on-site service or POWERVAR depot service. See the Limitations of Warranty section below for additional limitations & exclusions.

Battery Life Disclaimer: POWERVAR's standard battery warranty applies only to UPS and UPM products which are continuously connected to AC mains power, except during utility power outages. Products which are regularly and intentionally disconnected from AC mains power will experience battery discharge/charge cycles potentially far more numerous than those for which the battery was designed. As a result, products used in such applications will experience substantially reduced battery life. For that reason, POWERVAR's standard battery warranty does not apply for applications in which the UPS or UPM product is regularly and intentionally disconnected from AC mains power. POWERVAR UPS and UPM products used in such applications shall receive a 90 day warranty on batteries.