

Uninterruptible Power Systems

Desk Power

Models

300 VA
500 VA
650 VA



CHLORIDE
POWER PROTECTION



Features

- Hot Swap Battery Replacement
- Surge Protected Receptacles
- USB or RS232 Communication
- Fax/Modem Line Protector
- MopUPS Express Software Package
- Smallest Footprint and Weight in its Class
- Two-Year Warranty

Specifications

- Input Voltage: 120 V
- Output Voltage: 120 V
- Input Frequency: 60/50 Hz Auto Sensing
- Recharge Time: 8 Hours to 90% Capacity

Compliance

- UL/cUL listed to UL 1778 and CSA 22.2 No. 107.1


Desk Power




Versatile Orientation

- Vertical
- Horizontal
- Wall Mount

300 - 500 VA

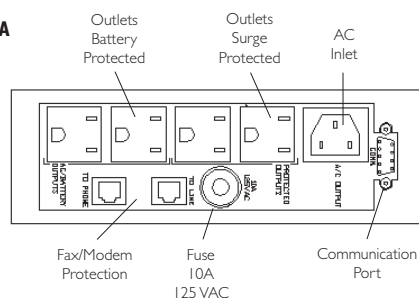

650 VA

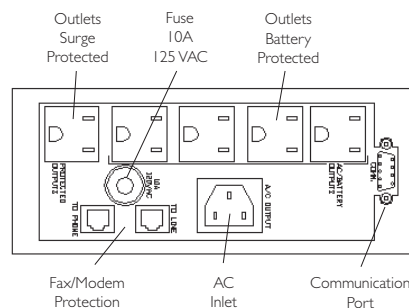

Performance and Physical Data

MODELS	DESK POWER 300	DESK POWER 500	DESK POWER 650
Maximum Capacity (volt-amps / watts)	300/180	500/300	650/390
Typical Runtime (Full load/Half load)	3 min./8 min.	3 min./8 min.	3 min./8 min.
Communications	USB or RS232 (9 pin)	USB or RS232 (9 pin)	USB or RS232 (9 pin)
Maximum Dimensions (Height)	7.5" (190 mm)	7.5" (190 mm)	7.5" (190 mm)
Maximum Dimensions (Width)	2.4" (60 mm)	2.4" (60 mm)	3.0" (76 mm)
Maximum Dimensions (Depth)	9.1" (230 mm)	9.1" (230 mm)	9.1" (230 mm)
Net Weight	5.5 lbs. (2.5 kg)	7.1 lbs. (3.2 kg)	8.6 lbs. (3.9 kg)
Shipping Weight	6.6 lbs. (3.0 kg)	8.2 lbs. (3.7 kg)	9.7 lbs. (4.4 kg)
Output Receptacles (UPS Protected)	NEMA 5-15 [2]	NEMA 5-15 [2]	NEMA 5-15 [4]
Output Receptacles (Surge Protected Only)	NEMA 5-15 [2]	NEMA 5-15 [2]	NEMA 5-15 [1]

CHLORIDE
POWER PROTECTION
www.chlorideups.com

28430 N. Ballard Dr.
Lake Forest, IL 60045
Phone: 800-239-2257, 847-990-3228
Fax: 800-833-6829, 847-549-7917
Service: 800-879-5011