

ON Series® Wallmount Extended Runtime UPS: For some, conventional UPSs are “good enough.” But many find ordinary protection measures inadequate. Others face performance expectations with no tolerance for downtime. ON Series Power Conditioned UPSs are engineered to satisfy these demanding applications.

Ultimate assurance of system reliability

All UPS makers acknowledge the broad range of power disturbances that compromise system reliability. And all address them to some degree. But here's the difference — ONEAC's proprietary power conditioning technology eliminates power problems entirely. Providing a level of protection that even the highest quality surge suppressor and filter technology cannot match.

Exceptionally dependable battery backup


We start with premium quality batteries. Thermally isolate them for maximum life. And employ unique charging circuitry attuned to the specific battery characteristics of each model to speed recovery and minimize stress on batteries. Automatic monitoring of battery condition ensures readiness, gives plenty of warning when replacement is recommended. And our patented battery pack allows replacement in under a minute without tools or training, without downtime, and without risk.

Proven durability, backed by a 5-year warranty

ONEAC UPS's robust design is impervious to the harshest electrical environments. Designed and manufactured under ISO9001 quality procedures, ON Series UPSs are exceptionally reliable. With an average mean time between failures more than twice as long as leading competitors. No surprise, then, that we back our UPSs with greater confidence — 5 years on all power and control systems, 2 years on the battery sub-system.



ONEAC's low-impedance, isolation transformer provides a level of protection superior to surge suppressor and filter based systems — provides greater assurance of system reliability.

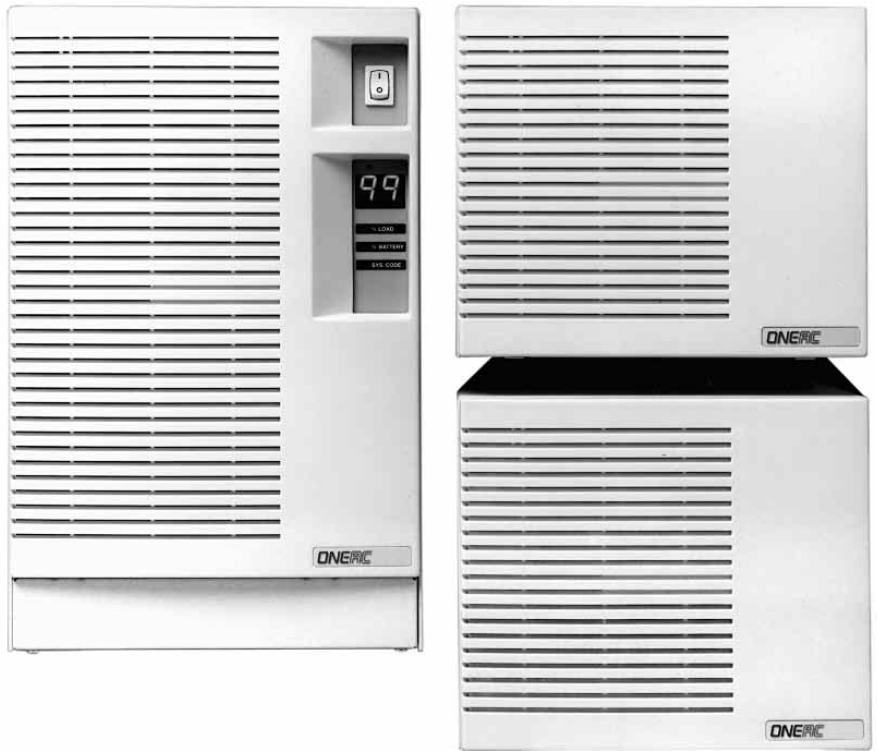

- **Extended runtime:** provides up to 8 hours of battery backup time
- **Wall mountable:** for applications with space constraints
- **Full-time, on-line isolating transformer:** eliminates all power contaminants
- **Sinusoidal waveform:** supports even the most sensitive loads
- **ONBoost®:** compensates for momentary voltage drops, conserves batteries
- **Intelligent serial communications:** for advanced diagnostics & remote management
- **On-site, on-line replaceable battery:** minimizes cost and downtime
- **Automatic self test:** ensures battery and system readiness
- **Designed & manufactured under ISO 9001:** assures consistent quality and performance
- **Global approvals:** UL, GS Mark, CE Mark
- **5-year warranty:** the best assurance of product quality and performance in the industry
- **Free 24-hour technical support**

ON Series Wallmount Extended Runtime UPS: Specifications

Power Conditioning

ONEAC's unique power conditioning architecture provides superior protection against the full range of power line disturbances. Components include:

Full output isolation: ONEAC's proprietary transformer design integrates power conditioning magnetics and voltage conversion magnetics in a single compact unit. Provides superior protection against lightning and other high energy surges.

Virtual Kelvin Ground®: Eliminates the full spectrum of conducted power line noise (from 50 kHz to 10 MHz) in all modes, reduces the effect of electrostatic discharge (ESD) and provides an exceptionally clean signal reference ground for electronic systems.

Communications

Basic mode provides standard protocols recognized by UPS monitoring software supplied with Windows NT, NetWare and Banyan operating systems.

Advanced mode uses ONEAC's content-rich ASCII packets to communicate with ONEAC's MopUPS® family of UPS monitoring software for NetWare, OS/2, a full catalog of UNIX operating systems and SNMP.

Global Approvals

Models for North America are FCC Class A certified and listed under UL 1778 and CSA22.2 safety standards. Models for Europe carry the GS and CE marks and are tested under the following standards: EN50091, EN60950, EN50081-1, EN55022 (CISPR 22), EN50082-1, IEC801-2, IEC801-3 and IEC801-4.

Model	ON 400	ON 600	External Battery Cabinet
Part number (60 Hz) (50 Hz)	ON400XA-WL-SNK ON400XI-WL-SNK	ON600XA-WL-SNK ON600XI-WL-SNK	ONXBC-WL-217 NA
Maximum capacity (volt-amps, watts)	400, 280	600, 400	NA
External battery	(1) included	(1) included	two 12V, 17AH
Runtime — hr:min (half load/full load)	1:53/0:55	1:17/0:29	NA
Power head maximum dimensions (HxWxD) inches (HxWxD) cm	15 x 8.5 x 9 38 x 22 x 23	15 x 8.5 x 9 38 x 22 x 23	NA NA
External battery maximum dimensions (HxWxD) inches (HxWxD) cm	7.5 x 8.5 x 9 27 x 22 x 23	7.5 x 8.5 x 9 27 x 22 x 23	7.5 x 8.5 x 9 27 x 22 x 23
Net weight — lbs. (50 Hz in kg)	60 (27)	64 (29)	35 (16)
Shipping weight — lbs. (50 Hz in kg)	70 (32)	74 (34)	40 (18)
Input connector* (60 Hz) (50 Hz)	5-15P (6 ft, detachable input cord) IEC320 (M/F detachable cord)	5-15P (6 ft, detachable input cord) IEC320 (M/F detachable cord)	battery sensor cable battery sensor cable
Output connector* (60 Hz) (50 Hz)	(4) NEMA 5-15R (4) IEC320 female	(4) NEMA 5-15R (4) IEC320 female	NA NA

* Other input and output connectors available upon request.

Runtime*

ON 400	ON400XA-WL-SNK 1 Battery	ON400XA-WSNK2 2 Batteries	ON400XA-WSNK3 3 Batteries	ON400XA-WSNK4 4 Batteries	ON400XA-WSNK5 5 Batteries	ON400XA-WSNK6 6 Batteries	ON400XA-WSNK7 7 Batteries	ON400XA-WSNK8 8 Batteries
50% load	1:53	3:56	6:03	8:25	10:24	12:30	15:05	17:20
100% load	0:55	2:00	3:16	4:29	5:29	6:33	7:54	9:05

ON 600	ON600XA-WL-SNK 1 Battery	ON600XA-WSNK2 2 Batteries	ON600XA-WSNK3 3 Batteries	ON600XA-WSNK4 4 Batteries	ON600XA-WSNK5 5 Batteries	ON600XA-WSNK6 6 Batteries	ON600XA-WSNK7 7 Batteries	ON600XA-WSNK8 8 Batteries
50% load	1:17	2:43	4:18	5:57	7:18	8:53	10:41	—
100% load	0:29	1:11	2:03	2:47	3:22	3:50	4:42	5:26

* Due to application specific conditions, actual runtime may vary.

ONEAC, ON Series, ONBoost, Virtual Kelvin Ground and MopUPS are registered trademarks of ONEAC Corporation. All other trademarks, product and corporate names are the property of their respective owners.

A CHLORIDE POWER PROTECTION COMPANY

ONEAC is a UL/BSI
registered corporation —
Certification No. A2900

